

SPECIFICATIONS


Size	Metric	British
Max. Working Height A	15.00m	49ft 3in
Max. Platform Height B	13.00m	42ft 8in
Overall Length(Without Outriggers)	3.98m	13ft 1in
Overall Length(With Outriggers) C	4.88m	16ft
Overall Width D	2.27m	7ft 5in
Overall Height(Rails Up) E	2.98m	
Overall Height(Rails Down) F	2.28m	7ft 6in
Platform Size(Length×Width)	3.98m×1.83m	13ft 1in ×6ft
Platform Extension Size G / H	1.43m/1.16m	4ft 8in/3ft 10in
Ground Clearance(Stowed/Raised)	0.30m	1ft
Wheelbase I	2.86m	9ft 5in
Turning Radius(Inside/Outside)	2.35m/5.20m	7ft 9in/17ft 1in
Tyres	33×12-20	33×12-20

Performance		
S.W.L	680kg	1499lb
S.W.L On Extension	227kg	500lb
Max. Occupants	7	7
Gradeability	50%	50%
Travel Speed(Stowed)	6.1km/h	6.1km/h
Travel Speed(Raised)	1.0km/h	1.0km/h
Max. Working Slope	2°/3°	2°/3°
Up/Down Speed	70/52sec	70/52sec

Weight		
Overall Weight(Without Outriggers)	7000kg	15432lb
Overall Weight(With Outriggers)	7900kg	17416lb

Power		
Diesel Engine	36.8kW/2700rpm	36.8kW/2700rpm
Diesel Tank	100L	100L
Hydraulic Tank	130L	130L

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

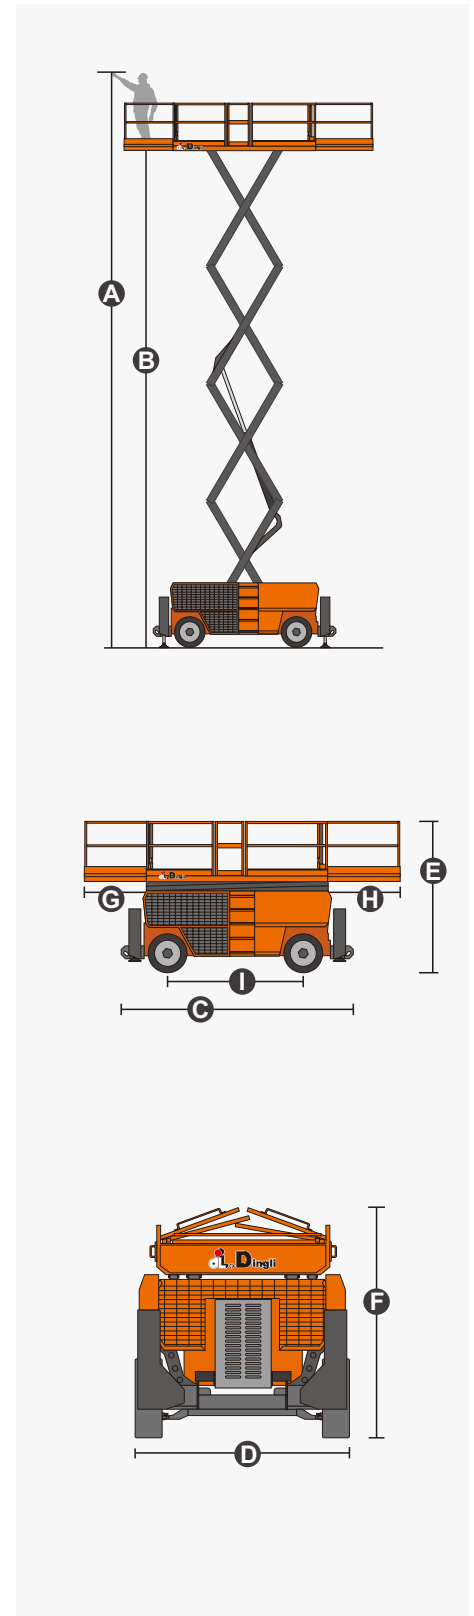

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Dual Slide-Out Platform Extension Deck
- 4×4 Drive
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Oscillating Axle Chassis
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System

Optional Items

Factory Tyres

- Solid Rubber Tyres **
- Non-Marking Tyres

Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Visual Spirit Level
- Hydraulic Generator
- Oil-Water Separator
- Outrigger Pad Package

** Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

ZHEJIANG DINGLI MACHINERY CO., LTD.

No. 188 Qihang Road, Deqing, Zhejiang P.R.China 313219

Telephone +86(572)8681688

Fax +86(572)8681960

E-Mail export@cndingli.com

[Http://www.cndingli.com](http://www.cndingli.com)

